


HQ1 Mini Bullet Camera (HQ1)

Products List > F Series > Special Camera > HQ1 Mini Bullet Camera (HQ1) > MTC-102HQDN, MTC-103HQDN

MTC-102HQDN MTC-103HQDN

MTC-102HQDN



MTC-103HQDN



FEATURES




MTC-102HQDN

- ◆ 1/3" Super Hi-Res. Color Camera
- ◆ Sony HQ1, 540TVL, 0.25Lux@F2.0
- ◆ Built-in DNR & Sense Up
- ◆ Built-in Pinhole Lens

MTC-103HQDN

- ◆ 1/3" Super Hi-Res. Color Camera
- ◆ Sony HQ1, 540TVL, 0.15Lux@F2.0
- ◆ Built-in DNR & Sense Up
- ◆ Built-in Board Lens
- ◆ Water Resistance:IP67

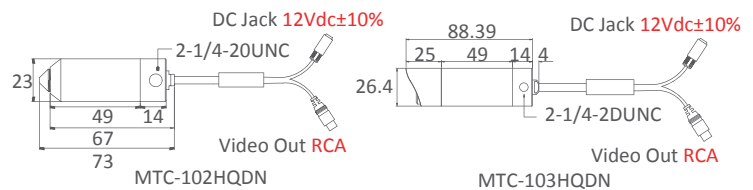

Tol:±0.5 Unit:mm

SPECIFICATIONS

	MTC-102HQDN		MTC-103HQDN	
	PAL	NTSC	PAL	NTSC
TV System	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD II			
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)	795(H)x596(V)	811(H)x508(V)
Resolution ; DSP	540TVL ; Sony HQ1			
Minimum Illumination	0.25Lux@F2.0		0.15Lux@F2.0	
Video Output ; Connector	1.0Vp-p Composite, 75Ω (RCA, Attach BNC Connector)			
Signal to Noise Ratio	More than 48dB			
Gamma Correction	0.45			
Synchronizing System	Internal			
Automatic Electronic Shutter	Automatic, 1/50(60)~1/100,000 sec.			
Automatic Gain Control	Automatic			
Automatic White Balance	Automatic			
Back Light Compensation	NA			
Flickerless	NA			
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic			
Digital Day&Night Mode	Automatic (B/W Mode<2Lux, Color Mode>5Lux)			
Automatic IRIS ; Connector	NA			
Adjustment VR	NA			
Lens Mount	Built-in Pinhole Lens		Built-in Board Lens	
Lens, Angle of View(H)	Standard:f3.7mm/F2.0 Option:f4.3mm/F2.0		Standard:f3.6mm/F2.0/72.5° Option:f8.0mm/36.5°, f12.0mm/24.5°	
Water Resistance	NA		IP67	
Max. Breaking Strength	NA			
Power Supply ; Consumption	12Vdc±10% ; 1.6W			
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum:RH80% ; RH90%			
Dimensions	23(DIA)x73(D)mm		26.4(DIA)x83.39(D)mm	
Net Weight	100g		100g	
Accessories Option (Page)	Bracket:Standard with MTB-204			