

H.264 Multiplexer Real-Time DVR (960H)

SDVR-5016ST-E




SDVR-5016ST-E

FEATURES



SDVR-5016ST-E

- ◆ Support 960H Resolution
- ◆ H.264 Compression Format
- ◆ Easy Operation on OSD (Graphics), Support R/C and/or Mouse control
- ◆ Diversity of Recording Type (Schedule/Manual/Alarm/Motion)
- ◆ Convenient USB Master Backup and Software Update
- ◆ Powerful USB Connections (USB Flash Memory, USB HDD, USB Mobile DVD-RW)
- ◆ Support 3GPP (Mobile Phone /PDA), PTZ Control
- ◆ CMS supports 256 DVR connection (single page displays 64 split at max., supports page turn)

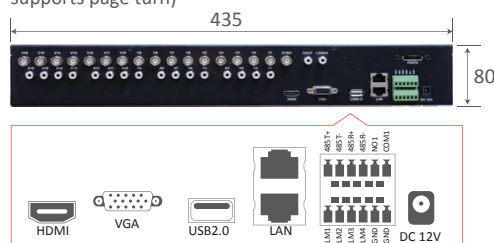

Tol:±0.5 Unit:mm

SPECIFICATIONS

		SDVR-5016ST-E
System	System Support	Stand Alone DVR
	Operation System	Embedded Linux
Video	Language	Simplified Chinese, Traditional Chinese, English, etc.
	Video System	PAL / NTSC
	System Update	Update Firmware via USB Flash Drive or Through the Network
	Input Channel / Connector	16 ch x BNC
Audio	Input Resolution	960H (PAL:1028x596@400fps, NTSC:1028x508@480fps) / D1 (PAL:720x576@400fps, NTSC:720x480@480fps)
	Input Compression	H.264
	Output Connector / Channel	VGAX1, CVBSx1, HDMIX1
	Output Resolution	960H (PAL:1028x596@400fps, NTSC:1028x508@480fps) / D1 (PAL:720x576@400fps, NTSC:720x480@480fps)
Alarm	Output Compression	H.264
	Input Channel / Connector	16 ch x RCA, 1 ch x RCA LINEIN,
Function	Output Channel / Connector	1 ch x RCA
	Menu	DVR Control or Can Be Set Via Browser
	Split Screen	1, 4, 9, 16
	Image Setting	Brightness, Contrast, Saturation, etc.
Network	Recording Stream	64K up to 2048 Kbps
	Recording Resolution / Speed	PAL:960H@25fps(Adjustable) NTSC:960H@30fps(Adjustable)
	Recording Mode	Manual, Timing, Alarm, Motion Detection
	Video Search	By Time, Event, Channel, Log
	Video Playback	16 ch Playback at the Same Time
	Video Backup	Network Backup, USB Backup (Flash Drives, USB Hard Disk, CDROM)
	Browser	IE 8.0 or Above
	Ethernet	10/100/1000M Auto Negotiation
Interface	Bit Rate Transmission	NA
	Supported Protocols	HTTP, DHCP, DDNS, PPPoE
	Video Streaming	H.264 Streaming
	Audio Streaming	Two-way Audio
	Users	Support 5 Simutaneous Users
	Security	ID/Password Protection, User Access Log
	Alarm Event	File Upload via FTP and Email/Notification via Email, HTTP, DI/DO
	Multicast	NA
	Mobile Client Support	Support iPhone(IOS4 or Above), Android(2.0 or Above), Syband (S60), Black Berry(V5.0, V6.0), Windows Phone (6.0, 6.5)
	General	PTZ Interface
Ethernet Interface		RJ45 (10/100/1000)
USB Interface		USB 2.0x2
Hard Disk Drive		SATA (Support 2T Hard Disk)
Hard Disk Number		4 pcs
General	Power Supply	12Vdc/100~240Vac(Power Adopter) ; 72W
	Operation ; Storage Temp.	0°C ~ 45°C ; -10°C ~ 60°C
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	435(W)x380(D)x80(H)mm
	Net Weight	4.2kg
	Accessories Option	Power Adopterx1, Power Cordx1, Remote Controlx1, CDx1, Mousex1, Sata Linex4, HDD Power Cordx2, Screwsx1set

*Specifications are unfixed and do not apply to customized projects. 130306