

Smoke Detector Covert Camera

MTC-305DH




MTC-305DH

FEATURES



MTC-305DH

- ◆ 1/3" Sony 760H Super HAD CCD II
- ◆ 600TVL, 0.3Lux@F2.0
- ◆ Powerful 128X D-WDR
- ◆ Shutter Mode (Auto)
- ◆ Built-in DNR
- ◆ 12Vdc

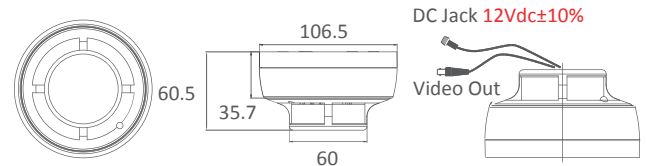

Tol:±0.5 Unit:mm

SPECIFICATIONS

		MTC-305DH	
		PAL	NTSC
TV System		PAL	NTSC
Image Sensor		1/3" Sony 760H Super HAD CCD II	
Number of Total Pixels		795(H)x596(V)	811(H)x508(V)
Resolution ; DSP		600TVL	
Minimum Illumination		0.3Lux@F2.0	
Wide Dynamic Range		D-WDR ; 128X Normal Camera	
Video Output ; Connector		1.0Vp-p Composite, 75Ω (BNC)	
Signal to Noise Ratio (S/N)		More than 48dB	
Gamma Correction		0.45	
IR LED ; Working Distance		NA	
Menu		NA	
Title		NA	
Synchronizing System		INTERNAL	
Digital Day&Night Mode		AUTO	
Electronic Shutter		AUTO (1/50(60)~1/100,000 sec)	
Automatic Gain Control		AUTO	
White Balance		ATW	
Back Light Compensation		OFF	
Flickerless		OFF	
Dynamic Noise Reduction		2D	
Language		NA	
Motion Detection ; Privacy		NA	
Camera Control Interface		NA	
Automatic IRIS ; Connector		NA	
Lens Mount		Built-in Board Lens	
Lens, Angle of View(H)		f2.8mm/F2.0/120°	
Water Resistance		NA	
Max. Breaking Strength		NA	
Power Supply ; Consumption		12Vdc±10% ; 1.0W	
Operation ; Storage Temp.		-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity		Maximum: RH80% ; RH90%	
Dimensions		106.5(DIA) X 60.5(H) mm	
Net Weight		220g	
Accessories Option		NA	

*Specifications are unfixed and do not apply to customized projects. 121116