


Entry-level IR Dome Camera

MTC-L615DH

FEATURES



Mechanical IR Cut Filter (ICR)



Option:



MTB-201




Wall Mount

Attach Ceiling
Top Plate

MTC-L615DH

- ◆ 1/3" Progressive Scan Sensor
- ◆ Excellent Low Light Performance
- ◆ 600TVL, 0.0001Lux (IR LED on at 2 Lux)
- ◆ Built-in 24 IR LEDs
- ◆ Built-in DNR
- ◆ Anti-Color Rolling
- ◆ Double Glass Lens for Avoiding Halos & Blur

DC Jack 12Vdc

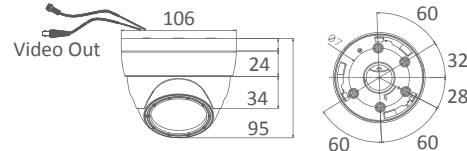

Tol:±0.5 Unit:mm

SPECIFICATIONS

MTC-L615DH	
TV System	PAL NTSC
Image Sensor	1/3" Progressive Scan Sensor
Number of Total Pixels	762(H)x504(V) 762(H)x504(V)
Resolution ; DSP	600TVL
Minimum Illumination	0.0001Lux (IR LED on at 2 Lux)
Video Output ; Connector	1.0Vp-p Composite, 75Ω
Signal to Noise Ratio (S/N)	More than 48dB (AGC off)
Gamma Correction	0.45
Mechanical IR Cut Filter (ICR)	Automatically Switches (B/W Mode<2Lux, Color Mode>5Lux)
IR LED ; Working Distance	24 units (IR LEDs on<2Lux) ; 10~20m
Synchronizing System	INTERNAL
Digital Day&Night Mode	NA
Electronic Shutter	AUTO (1/50(60)~1/100,000 sec)
Automatic Gain Control	AUTO
White Balance	ATW
Back Light Compensation	OFF
Flickerless	NA
Dynamic Noise Reduction	AUTO
Anti-Color Rolling	AUTO
Automatic IRIS ; Connector	NA
Adjustment VR	Built-in Board Lens
Lens, Angle of View(H)	Standard:f4.3mm/F2.0/81°, Options:f6.0mm/F1.8/60°
Water Resistance	NA
Max. Breaking Strength	NA
Power Supply ; Consumption	12Vdc±10% ; IR on:2.4W(194mA) IR off:0.48W(37mA)
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C
Operation ; Storage Humidity	Maximum:RH80% ; RH90%
Dimensions	106(DIA)x95(H)mm
Net Weight	275g
Accessories Option	Wall Bracket:MTB-201

*Specifications are unfixd and do not apply to customized projects. 131004