

# SHANY

## Standalone NVR

# SNVR-8004ST-P

- 4ch 1080P Standalone NVR
- Linux Embedded – Free from PC Crash and Virus Attack
- High throughput for Megapixel Camera Recording
- Local Display with HDMI / CVBS / VGA Output
- Digital PTZ and Multi-view
- Web-based Configuration, Live Viewing, Playback
- Auto Search Camera
- Support Peer to Peer Mobile Viewing
- Support PoL (Power over LAN) & WiFi / 3G Dongle
- Support Video Forwarding



### Specifications

<b>System</b>	CPU	SoC
	System	Standalone NVR
	Operation System	Embedded Linux
	Language	English, Traditional Chinese, Simplified Chinese, Russian, Polish, French, Dutch, Spanish, Italian, Portuguese, Thai, Persian, Hebrew, Kazak
<b>Video</b>	System Update	Update Firmware via USB /Ethernet
	Recording Cameras	Max. 4ch 1080P
	Video Compression	H.264
	Recording Performance	1Mbps~8Mbps, Max. 20Mbps
<b>Audio</b>	Audio&Video Recording	Audio and Video Recording in Synchronization (Depends on IP Camera)
<b>Alarm</b>	Alarm In	NA
	Alarm Out	NA
<b>Function</b>	Menu	Can be set via browser or local control ; Local Control: Mouse
	Split Screen	1, 4
	Recording Stream	H.264
	Recording Resultion / Speed	1080P: 120fps, 720P: 120fps
	Recording Mode	Scheduled Record, Manual Record, Dynamic Detection, Alarm Trigger
	Video Search	Time Line Search, Event Search
	Remote Live View Control	Live View, Preset/Go, PTZ, Remote I/O, Snapshot, Multi-view, 15X Digital PTZ
	Video Playback	1080P: 1ch playback, 720P: 4ch playback simultaneously (4ch recording available with playback)
	Video Backup	Video Backup via USB Interface
<b>Network</b>	Browser	IE 9.0 or Above
	Ethernet	10/100M Auto Negotiation x1
	Supported Protocols	TCP/IP, PPPoE, DHCP, DNS, RTSP, HTTP, SMTP
	Video Streaming	H.264 ; 4ch 1080P, 4ch 720P
	Audio Streaming	Standard Compression G.711
	User	Support 5 Simutaneous Users
	Security	ID/Password Protection, User Access Log
	Alarm Event	Event Type: Video Loss, Sensor Triggered, Motion Detection Triggered
	Mobile Surveillance	Support: Android, iPhone, Windows Mobile, Blackberry, Symbian
	Mobile Client Support	Supported
<b>Interface</b>	PTZ Control	PTZ Control via Ethernet
	Ethernet Interface	RJ45 x1
	PoL (Power over LAN)	RJ45 x4
	USB Interface	USB 2.0 x3
	Video Out	VGA x1, HDMI x1, BNC x1
	Audio	Audio In (RCA) x1 ; Audio Out (RCA) x1
	Hard Disk Drive	SATA x1, Max. 4TB
<b>General</b>	Power Supply	12Vdc 2.6A
	Power Consumption	≤25W (Without HDD)
	Operation Temperature	-10°C~55°C
	Storage Temperature	-10°C~60°C
	Operation Humidity	10%~90%
	Dimensions	260(W)x43(H)x220(D)mm
	Net Weight	1.5kg
Supported IP Cam Brand(s)	SHANY, ONVIF	


\*Specifications are subject to change without notice. 130904



## Appearance



## Total Solution

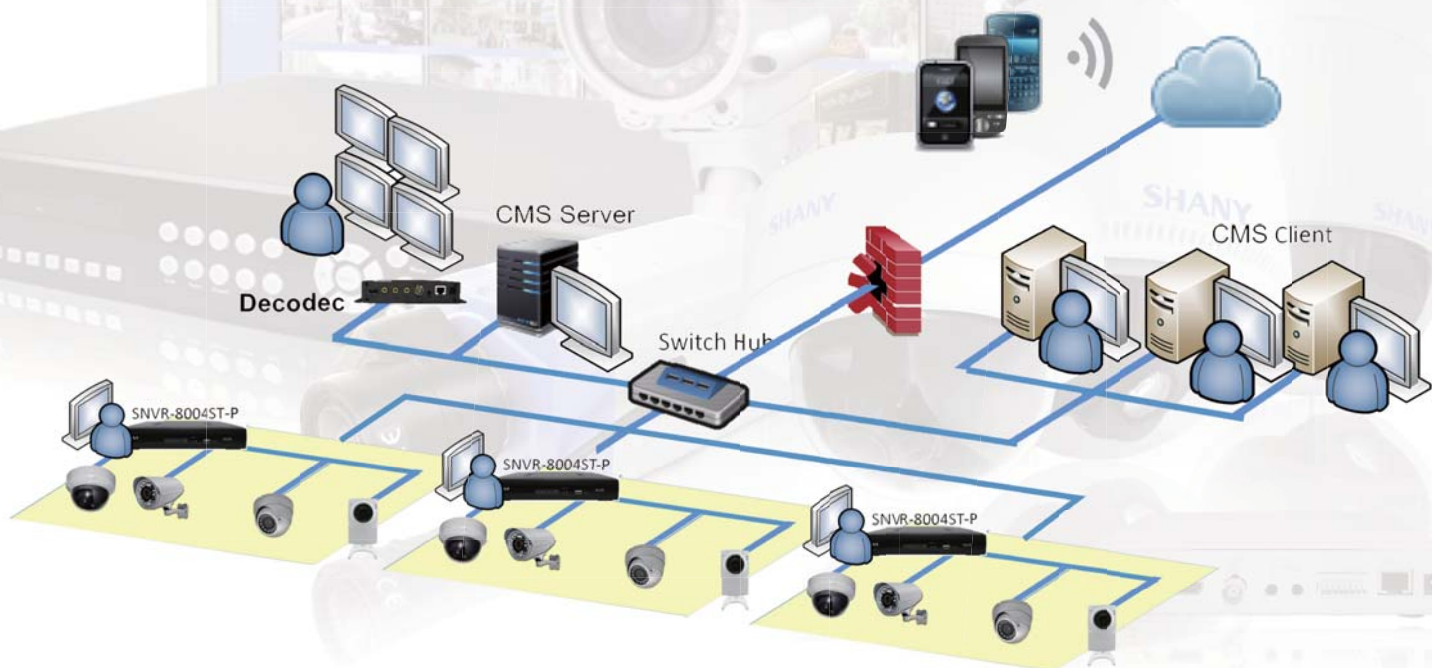

## Field Application

Retail Store



Small Office



Warehouse



Residential



Authorized Distributor